


CEMB[®] USA

SM675

Professional grade articulating swing arm tire changer with leverless mount head and high-performance BPS (Bead Press System) is the perfect choice for all OEM automotive and light truck wheels including difficult to mount stiff side wall low-profile high-performance tires, deep drop center rims and multi-ply commercial and industrial wheel applications. The unique design takes considerably less floor space compared to traditional tilt-back designs and utilizes an extremely rigid column and vertical arm with pneumatic locking and high-quality locking roller guides for long lasting, smooth movement.

www.cemb-usa.com

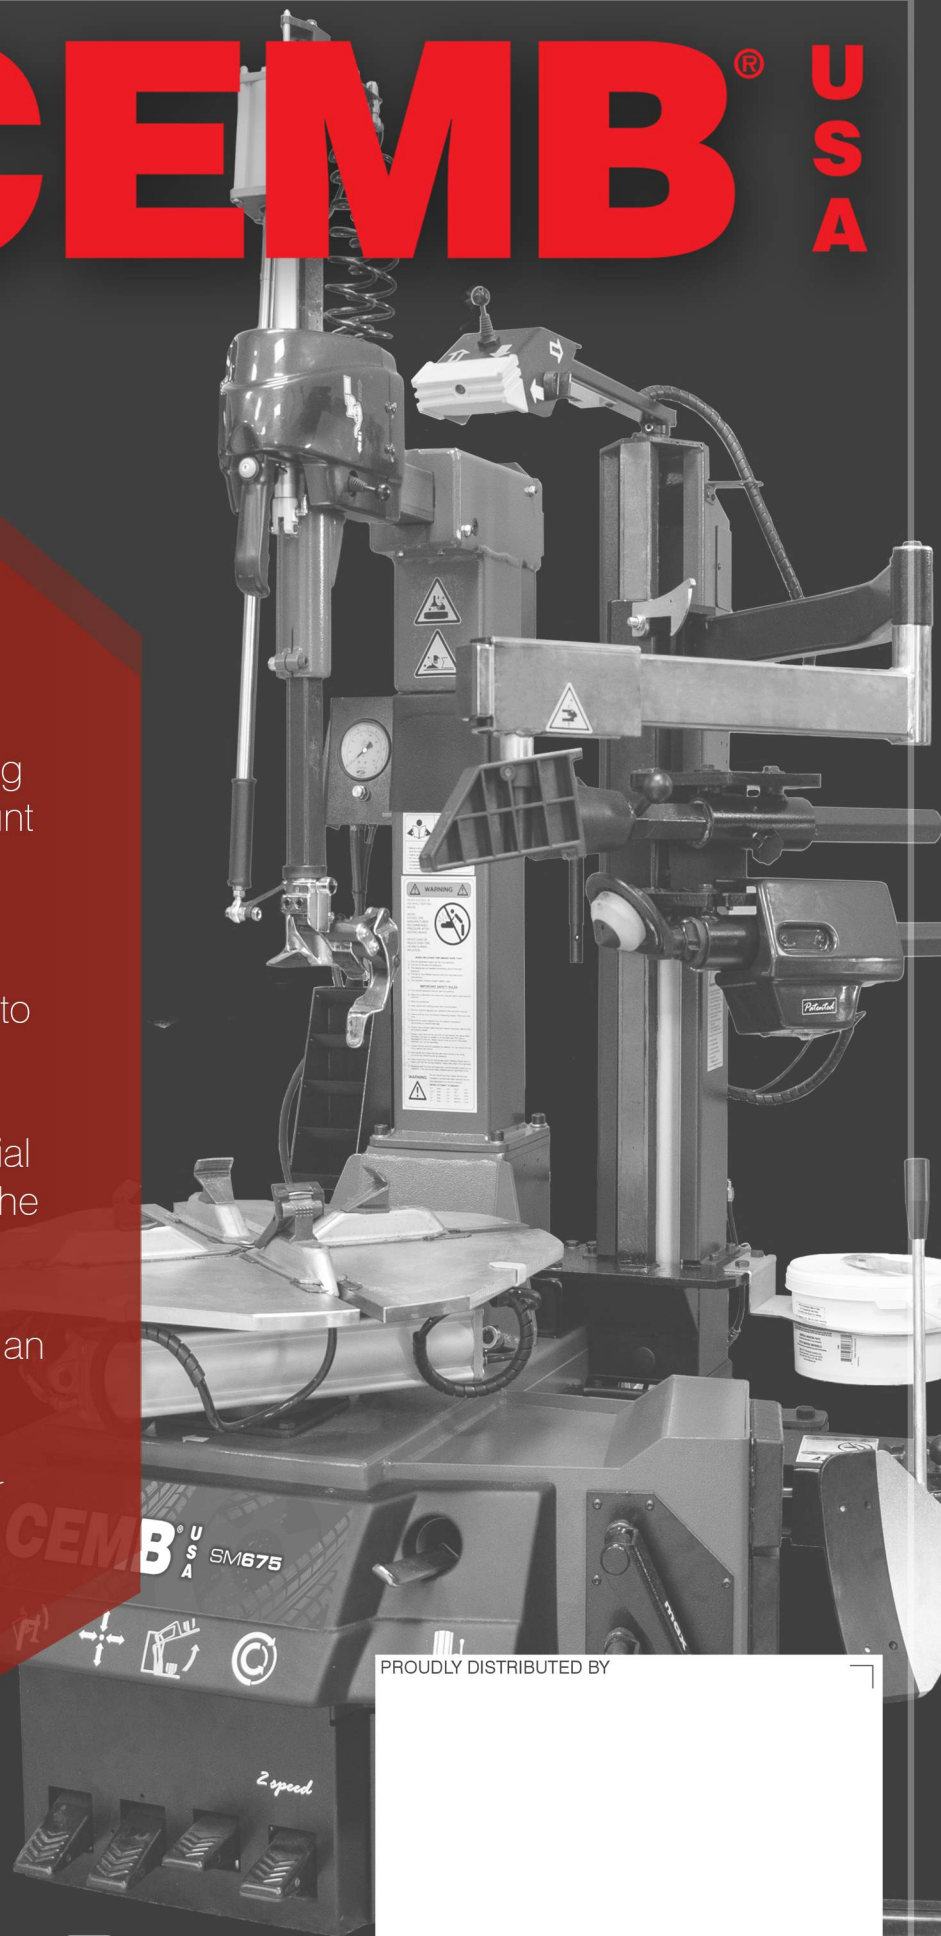

PROUDLY DISTRIBUTED BY



SM675



Leverless Mount Head

Provides simple fingertip activated demounting of high-performance low profile, stiff sidewall run flats and commercial use multi-ply tires.

Table Top Clamping

Is self-centering with rim diameter index guides to aid in simple external rim clamping avoiding tire and rim scratches.

High Torque Motor

220v 2-speed motor and heavy-duty transmission handles the most difficult tires and deep drop center rims.

Bead Press System

Provides simple servicing of stiff sidewall tires and deep drop center rims. Dual bead press aids save time and offers flexibility in multiple mounting method.

Two Stage Inflation

Utilizes bead sealing jets optimized by placement at the clamping jaws. Pressure limiter provided to ensure operator safety during tire inflation.


Bead Breaker Shovel

Foot operated side mounted bead breaker shovel combines speed with power for everyday wheel applications to save time.



DIMENSIONS

CONTACT

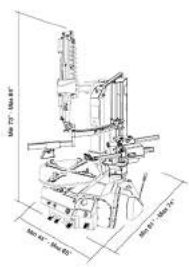

Power Supply:	220V, 1ph, NEMA Plug L6-20P
Air Pressure:	115-145 psi (8-10 bar)
Rim Diameter (Ext.):	12" - 26"
Tire Diameter:	36" (915 mm)
Max. Wheel Width:	15" (380 mm)
Turn Table Speed:	8-15 rpm
Shipping Weight:	1050 lbs (476 Kg)

CEMB[®] U S A

CEMB USA - BL Systems Inc.
2873 Ramsey Road, Gainesville, GA 30501
(678) 717-1050 - sales@cemb-usa.com
www.cemb-usa.com